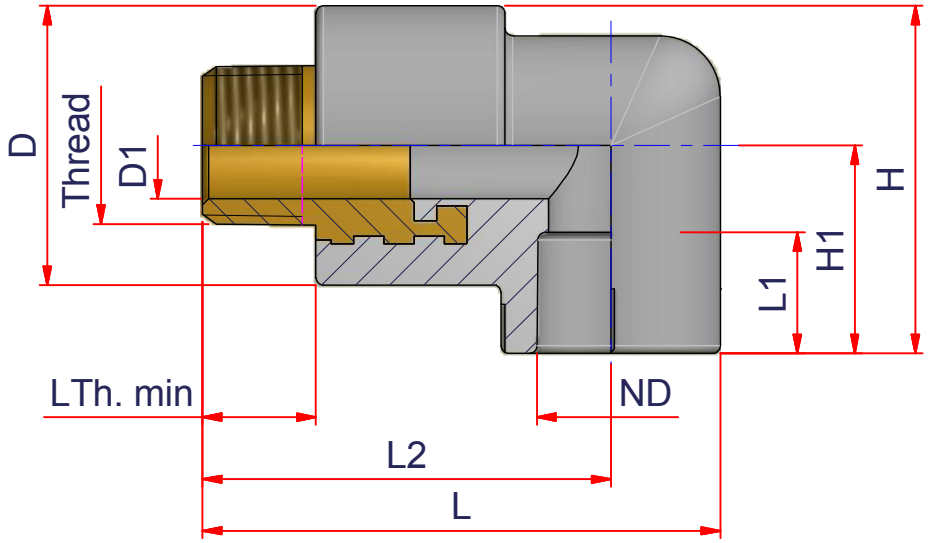

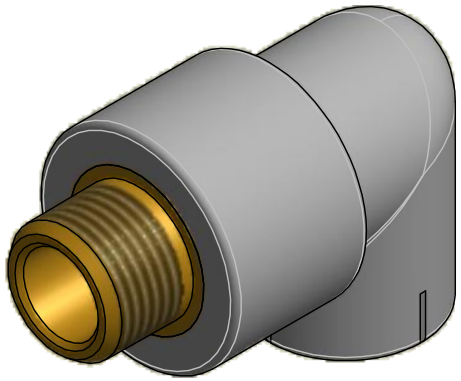

CODE	ND	D1	D	Thread	L Thread min	L1	L2	L	H1	H
27NGM2012NPT	1/2" => 20 mm	0.55	1.46	1/2" NPT	0.53	0.63	2.13	2.70	1.08	1.81
27NGM2512NPT	3/4" => 25 mm	0.55	1.46	1/2" NPT	0.53	0.67	2.13	2.82	1.20	1.93
27NGM2534NPT	3/4" => 25 mm	0.73	1.65	3/4" NPT	0.55	0.67	2.13	2.89	1.20	2.03
27NGM3212NPT	1" => 32 mm	0.55	1.65	1/2" NPT	0.53	0.71	2.40	3.23	1.42	2.24
27NGM3234NPT	1" => 32 mm	0.73	1.65	3/4" NPT	0.55	0.71	2.40	3.31	1.42	2.24
27NGM321NPT	1" => 32 mm	0.95	2.13	1" NPT	0.68	0.79	2.56	3.41	1.85	2.91

NIRON

nupi AMERICAS

ITEM: NGM_NPT

C:\Vault_Temp\Disegni\Corinna\Tabelle\Niron\POLLICI USA\Ngm_NPT pollici\NI10058.dwg

DESC: MALE THREADED 90° ELBOW W/NPT
LEAD FREE BRASS - SOCKET FUSION

DRAWING No: NI10058

SHEET OF 1 1

REV. -1

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned exclusing values as per standard ASTM F2389

All right reserved - Drawing cannot be reproduced in anyway, failure todo so will entitle nupigeco to legal action. Information on this document are subject to change without notice